

Delock 19" Optical Fiber Splice Box 24 x LC Duplex OS2 1U complete assembled

Description

This pre-assembled optical fiber splice box by Delock can be mounted in a 19" rack and is ideal for quickly and securely setting up the fiber optic network in buildings.

Complete assembled

The optical fiber box is equipped with 24 LC Duplex couplers and fitted with 48 pigtails, which are already inserted in the splice cassette.

With drawer

The front panel can be pulled out, making it possible to work on both sides of the couplers without removing the cover.

Note

The pigtails are not ready for splicing.



Item no. 67009

EAN: 4043619670093

Country of origin: China

Package: Box


Technical details

- For mounting in 19" racks, 1U
- Splice box with 24 x LC Duplex couplers
- Extendable tray
- With splice cassette
- Fiber pigtails are coloured in accordance with TIA/EIA-598
- OS2 pigtails
- Fibre: 9/125 µm
- Cable jacket material: LSOH
- Cable length: ca. 1.5 m
- Housing colour: black
- Housing material: metal
- Dimensions (LxWxH): ca. 482 x 220 x 44 mm

Package content

- 19" optical fiber splice box
- 4 x screw
- 4 x caged nut
- 4 x washer

Images

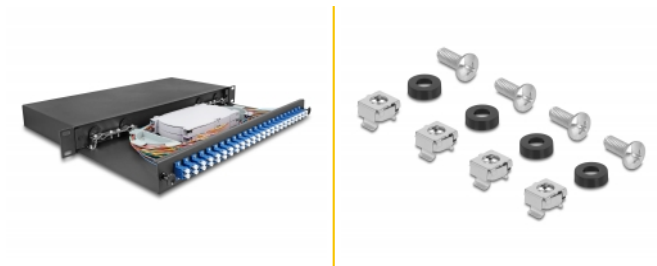

General

Mounting type:	19 in
----------------	-------

Physical characteristics

Housing colour:	black
Housing material:	metal
Cable length:	1.5 m
Length:	482 mm
Width:	220 mm
Height:	44 mm