

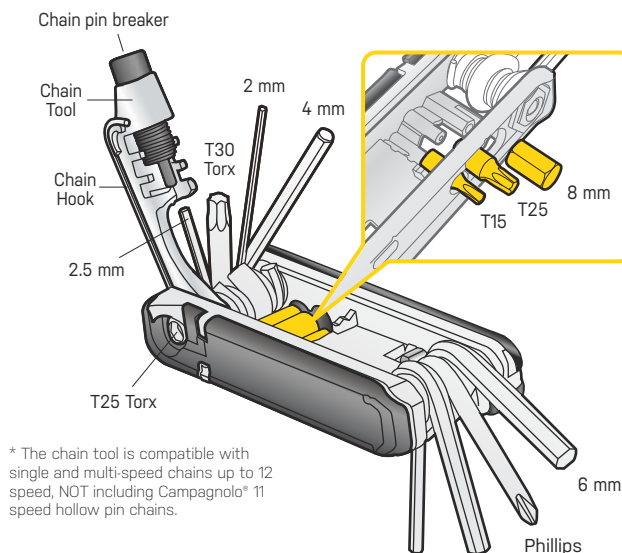


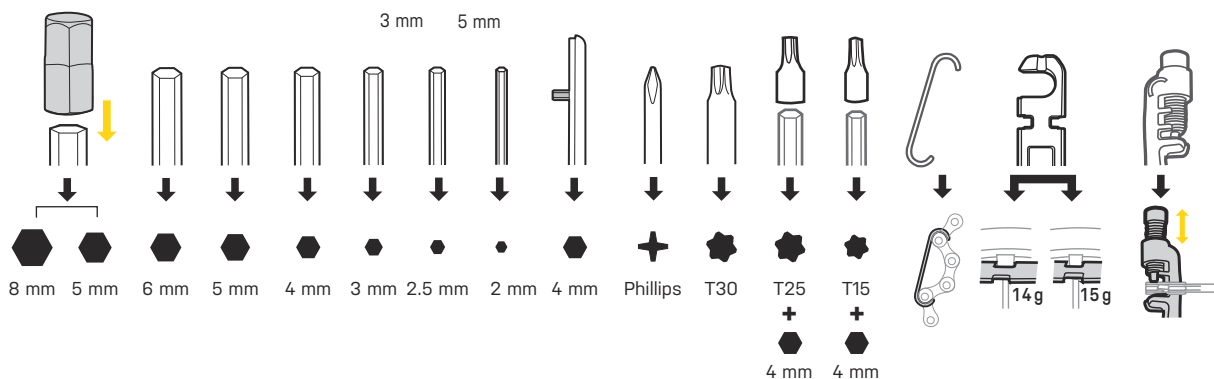

* The chain tool is compatible with single and multi-speed chains up to 12 speed, NOT including Campagnolo® 11 speed hollow pin chains.

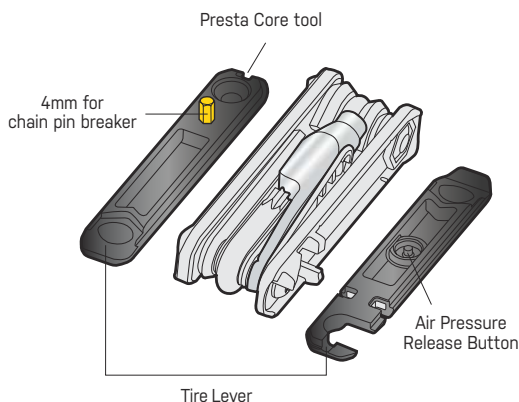

USING CHAIN TOOL

Install new chain pin or remove old chain pin.

Primary Chain Link Fence
Secondary Chain Link Fence

Use Primary Chain Link Fence to install or remove chain pin. Use Secondary Chain Link Fence to loosen stiff links.

4mm Allen key



Chain Pin Tool

WARNING

When pressing in the chain pin, push down on the top of the chain to keep it fully engaged in the chain tool cradle. Make sure the press pin of the chain tool is centered against the chain pin.


Inspect chain rivet again and be sure chain links can bend freely after replacement.

Press chain pin as little as necessary to loosen the stiff link.

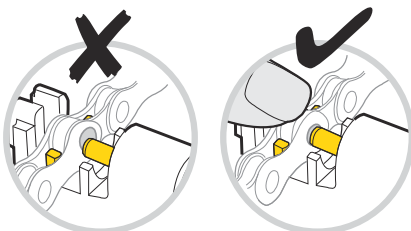




USING CHAIN HOOK AND CHAIN TOOL

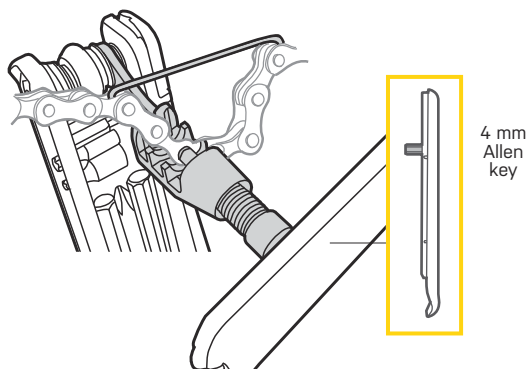


TOOL MAINTENANCE

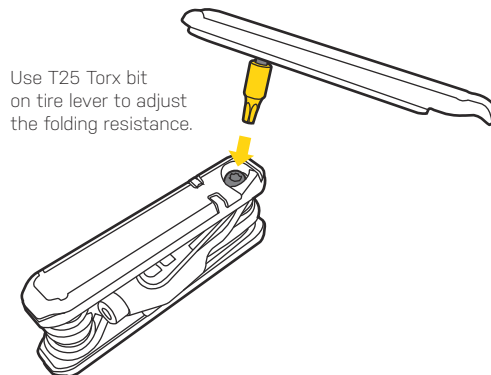


USING T25 TORX

Tighten disc brake rotor bolts with the T25 Torx bit.

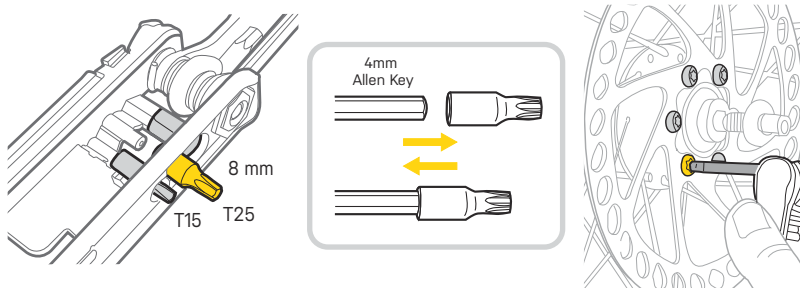


USING 8MM ALLEN KEY


Insert 8mm Allen key into 8mm tool bit.



USING TIRE LEVERS

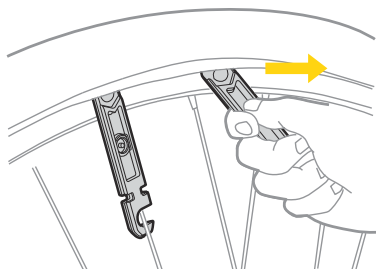


BUILT-IN PRESTA CORE TOOL



Tighten or remove two-piece Presta valve cores.

USING AIR PRESSURE RELEASE BUTTON



MAINTENANCE

1. Lubricate and maintain tool with Teflon® based lubricant when needed.
2. To prevent rusting, keep tool dry.

* Campagnolo® is a registered trademark of Campagnolo S.r.l.
* Teflon® is a registered trademark of DuPont.

WARRANTY

2-year Warranty: All mechanical components against manufacturer defects only.

Warranty Claim Requirements

To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this manual.

* The specifications and design are subject to change without notice.

Please contact your Topeak dealer with any questions.

For USA customer service call: 1-800-250-3068 / www.topeak.com