

AK5080

PC1025

CABLE REQUIREMENTS:

Colour: BLACK
Type: 3 Core 1.00mm² H05VV-F
(European Approved)
Conductor Colour Codes:
Earth (Green & Yellow) 
Neutral (Blue) 
Live (Brown) 

Complete Powerlead Rated: 10A/250V
PLUG / END A REQUIREMENTS:

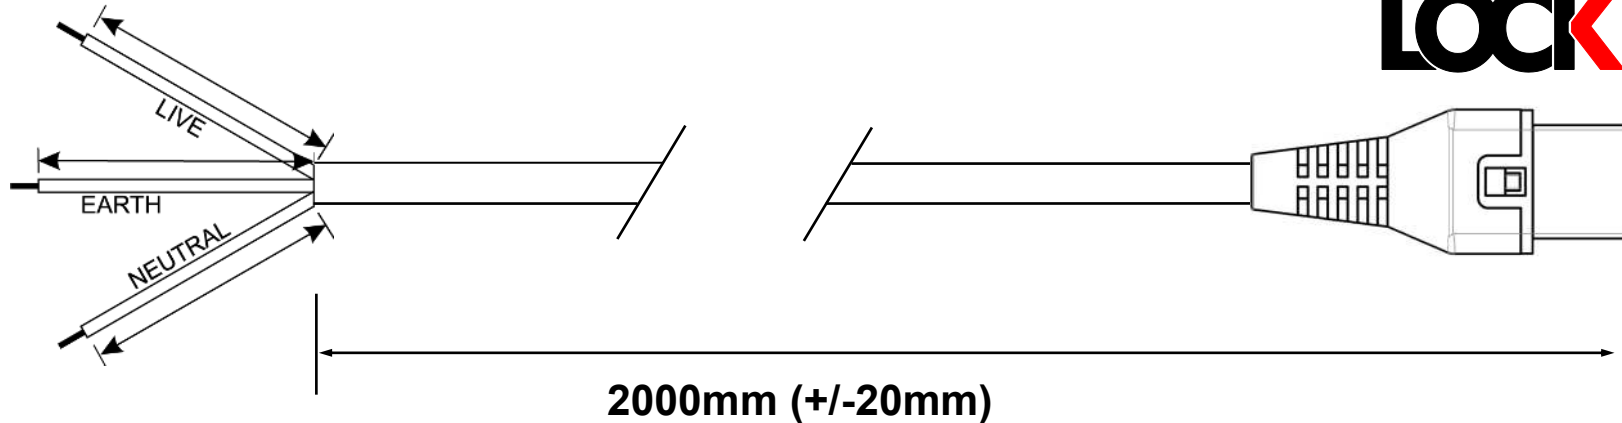
Type: Free End
Colour:
Rating:
Reference: See Further comments /
Terminations below.

CONNECTOR / END B REQUIREMENTS:

Type: SW905
Colour: BLACK
Rating: 10A
Reference: C13 IEC Lock Connector
(European Approved)

**Free End Overall
Strip Lengths
(Includes Terminations)**

Live = 50mm (+/- 2mm)
Earth = 50mm (+/- 2mm)
Neutral = 50mm (+/- 2mm)


EXTRA REQUIREMENTS:

PACKAGING OUTER100
PIN PROTECTING COVERNO
WIRING INSTRUCTIONSNO
PRE-SHIPMENT INSPECTION REQUIRED....NO

COMMENTS:

NO knock out cover over red slide bar

CHANGE MANAGEMENT:
HANKING

None

TERMINATIONS / FURTHER COMMENTS:
LIVE / BROWN

Type: Stripped End

Size: 6mm

NEUTRAL / BLUE

Type: Stripped End

Size: 6mm

EARTH / GREEN & YELLOW

Type: Stripped End

Size: 6mm