


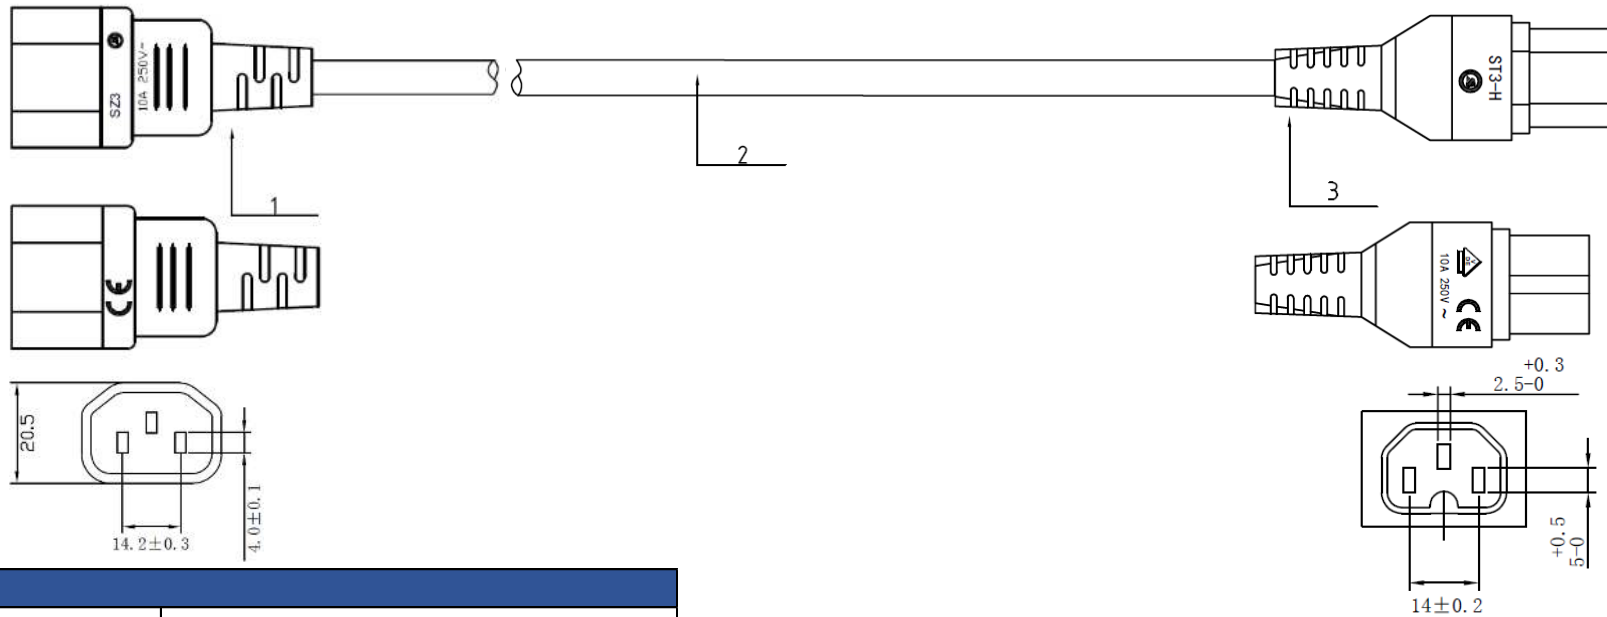

Specifications

Type	Powercord C14 - C15
Rated voltage	250V
Rated current	10A
Approval	VDE / CE

Cable (2)

Conductor type	Stranded
Conductor material	Bare Copper
Type	H05RN-F 3G 1.0mm ²
Jacket material	Neoprene rubber
Cable colour	See list

Plug (1,3)

Connector 1	C14
Connector 2	C15

		0.6m	1.2m	2m	2.5m	3m	5m
Color	Type	±15mm	±20mm	±30mm	±30mm	±50mm	±50mm
Black	C14-C15	AK5232	AK5233	AK5003	AK5234	AK5339	AK5341
White	C14-C15	AK5435	AK5436	AK5437			
Red	C14-C15	AK5298	AK5304	AK5308		AK5335	AK5336
Blue	C14-C15	AK5299	AK5305	AK5309		AK5337	AK5338
Green	C14-C15	AK5302	AK5306	AK5310			
Yellow	C14-C15	AK5303	AK5307	AK5311			



Drawn by : ELS

ACT Powercord C14-C15

Item : See list

Revision : A

Date : 08-01-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only.
This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions.
Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.