



APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

Brand : APC

Product code: SMT2200IC


Product name : APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

- 2200VA/1980W line interactive pure sine wave tower UPS
- Ideal for servers, storage, networking, business VoIP and desktops, retail POS
- Automatic Voltage Regulation helps correct utility voltage
- Cloud-based remote power monitoring via SmartConnect Ethernet Port
- Graceful shutdown using serial or USB cables via PowerChute Serial Shutdown

APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA. UPS topology: Line-

Interactive, Output power capacity: 2.2 kVA, Output power: 1980 W. AC outlet types: C13 coupler, C19 coupler, AC outlets quantity: 9 AC outlet(s), USB port type: USB Type-A. Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 8.7 min, Typical backup time at half load: 25 min. Product colour: Black, Display type: LCD. Compliance certificates: RoHS, Certification: CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE

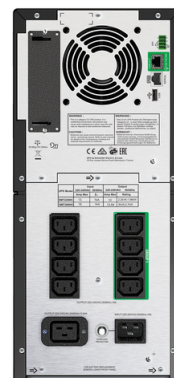


Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at half load	25 min
Output power capacity *	2.2 kVA	Battery life (max)	5 year(s)
Output power *	1980 W	Battery recharge time	3 h
Waveform *	Sine	Design	
Input operation voltage (min) *	151 V	Product colour *	Black
Input operation voltage (max) *	302 V	Display type	LCD
Input frequency *	50/60 Hz	LED indicators	✓
Output operation voltage (min)	220 V	Operational conditions	
Output operation voltage (max)	240 V	Operating temperature (T-T)	0 - 40 °C
Surge energy rating	365 J	Storage temperature (T-T)	-15 - 45 °C
Response time	6 ms	Operating relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Storage relative humidity (H-H)	0 - 95%
Output voltage Total Harmonic Distortion (THD)	5%	Operating altitude	0 - 3000 m
Noise level	45 dB	Non-operating altitude	0 - 15000 m
Power protection features	Over voltage, Overload	Certificates	
Audible alarm(s)	✓	Compliance certificates	RoHS
Audible alarm modes	Alarm when on battery, Low battery alarm, Battery replacement	Certification	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE
Auto-restart	✓	Packaging content	
Ports & interfaces		Cables included	RS-232, USB cable
AC outlet types	C13 coupler, C19 coupler	Management card included	✗
AC outlets quantity	9 AC outlet(s)	Sustainability	
Number of output IEC jumpers	2	Sustainability certificates	Green Premium
USB port	✓		
USB 2.0 ports quantity	1		

Ports & interfaces		Weight & dimensions	
USB port type	USB Type-A	Width	197 mm
Serial interface	✓	Depth	544 mm
Serial ports quantity	1	Height	435 mm
Ethernet LAN (RJ-45) ports	1	Weight	48.8 kg
SmartSlot	✓	Packaging data	
SmartConnect port	✓	Software CD	✓
Battery		Package width	381 mm
Battery technology	Sealed Lead Acid (VRLA)	Package depth	762 mm
Typical backup time at full load	8.7 min	Package height	699 mm
		Package weight	61.9 kg
		Logistics data	
		Products per pallet	9 pc(s)
		Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	3715.93



0731304337317



731304337317

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.