


Laserliner®

CenterScanner Plus



Professional drill guide for reliable determination of entry and exit points of wall and ceiling drill holes

Rev.1216

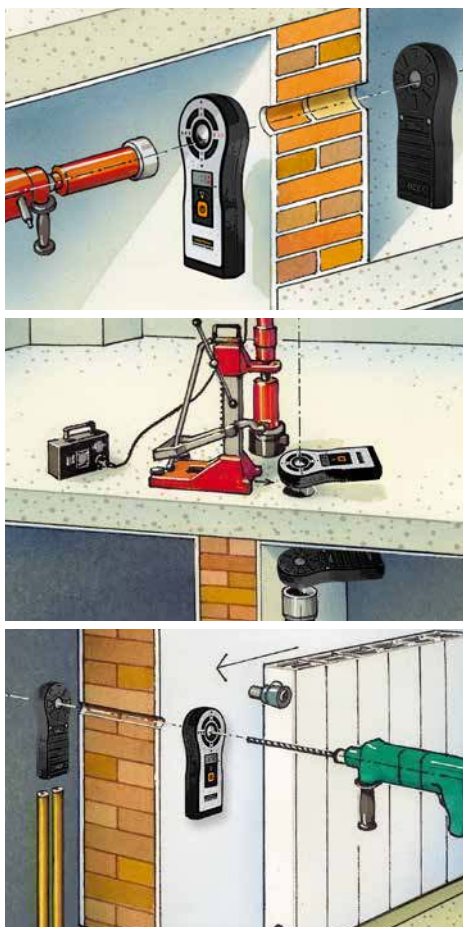

- System consisting of a transmitter and a receiver enables **easy drill channel alignment**
- **Clearly visible LED indicators** enable precise localization of entry and exit positions
- Easily **accessible marking aids** in the transmitter and receiver **for centring**
- Integrated display can be used **to determine the required drilling depth** up to 200 cm
- TX transmitter with **integrated metal and voltage detection up to 150 cm** to prevent misplaced holes
- **Visual and acoustic warning** when foreign objects are detected

TECHNICAL DATA

CENTERSCANNER PLUS REC V

INDICATORS

13 LEDs, acoustic warning signal

LED DISPLAY 3 x 7 segment

MEASURING DEPTH

up to 150 cm for position detection
up to 200 cm for depth display

ACCURACY typical 3% of measuring depth

OPERATING TIME approx. 20h

OPERATING CONDITIONS -30°C ... 40°C, humidity < 80%, no condensation

STORAGE CONDITIONS -40°C ... 60°C, humidity < 80%, no condensation

POWER SUPPLY

3 x 1,5 V alkaline batteries (type AAA)

DIMENSIONS (W x H x D)

75 x 172 x 28 mm

WEIGHT (incl. batteries) 210 g

CENTERSCANNER PLUS TX

INDICATORS

11 LEDs, acoustic warning signal

OPERATING TIME approx. 12h

OPERATING CONDITIONS -30°C ... 40°C, humidity < 80%, no condensation

STORAGE CONDITIONS -40°C ... 60°C, humidity < 80%, no condensation

POWER SUPPLY

3 x 1,5 V alkaline batteries (type AAA)

DIMENSIONS (W x H x D)

75 x 172 x 28 mm

WEIGHT (incl. batteries) 200 g



Clearly visible LED indicators

Easily accessible marking aids

Integrated LCD display

ARTICLE	ARTICLE NO	EAN-CODE	PU
CenterScanner Plus	075.300A	4 021563 699926	5



CenterScanner Plus

- inclusive carrying case
- + CenterScanner Plus REC V
- + CenterScanner Plus TX
- + Batteries
- + Adhesive kit
- + Sliding pads (4x)

Packing dimension (W x H x D)

–



TX

3x
AAA

REC V

3x
AAA

