



Datenblatt - Fiche technique - Data sheet


11.99.5534



VALUE Monitorkabel HDMI High Speed, ST-ST, 15,0 m


VALUE Câble de raccordement pour écran HDMI High Speed M-M, 15,0 m

VALUE HDMI High Speed Cable, M/M, 15.0 m

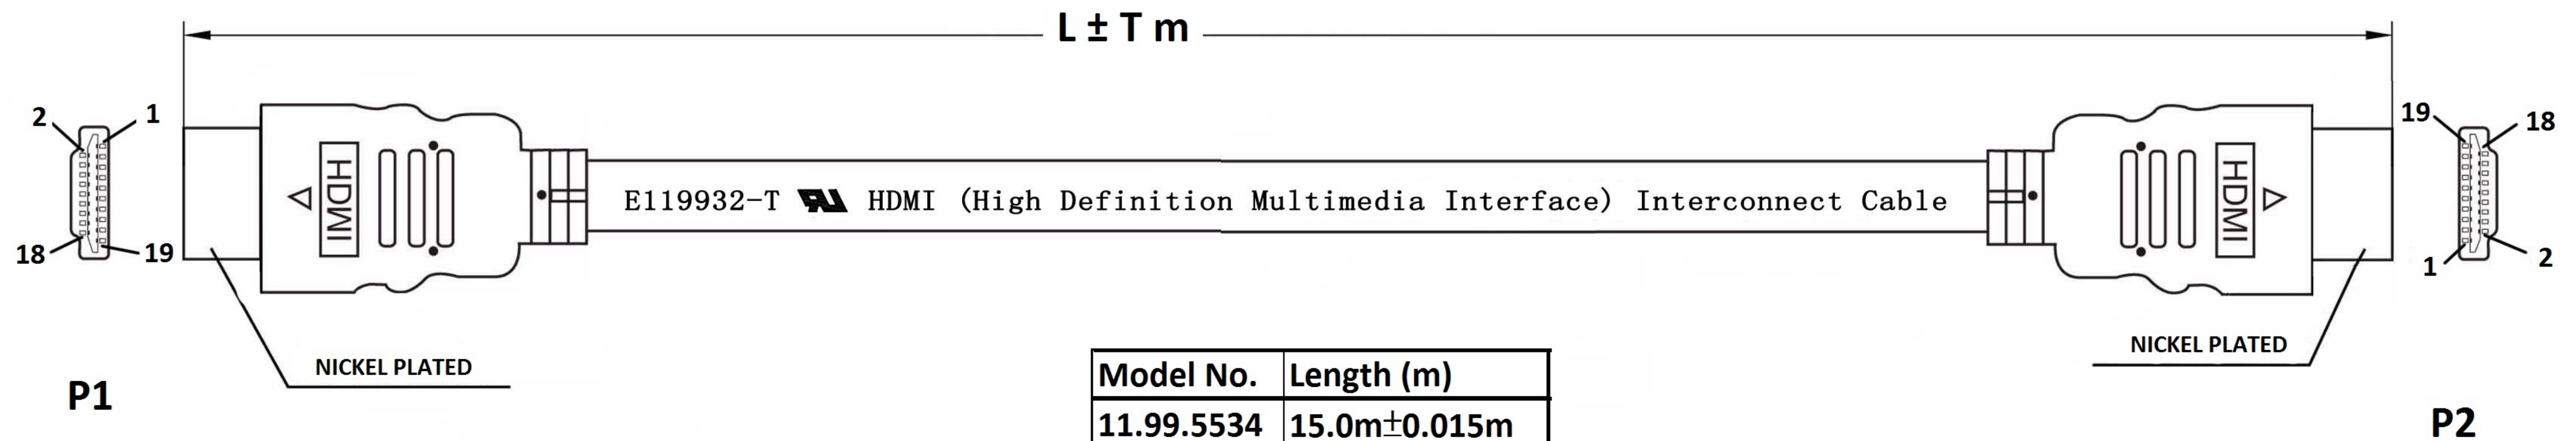

Model No.	Length (m)
11.99.5534	15.0m±0.015m
11.99.5536	20.0m±0.015m

SPECIFICATION : 24AWG (7/0.20BC x 1P + 7/0.12CCS + AM) x 4PCS + 7/0.12CCS x 5C + 7/0.12CCS x 1P + AM + 7/0.12CCS + 128/0.12ALM + PVC 9.0mm±0.2mm			
ITEM	SPECIFICATION		
CONDUCTOR	AWG	24AWG	28AWG
	MATERIAL	BC	CCS
	COND. SIZE	7/0.20BC±0.008mm	7/0.12CCS±0.008mm
INSULATION	MIN. AVG. THICK	0.20mm	0.10mm
	MATERIAL	FM-PE+SKIN	PE
	OD	1.20±0.05mm	0.8±0.05mm
TWISTED PAIR	NO.	1P x 4C	5C+1P
	AWG	24AWG+28AWG	
	MATERIAL	BC+CCS	
SPREAD AL. FOIL	COND. SIZE	(7/0.20BC±0.008mm) x 2 + (7/0.12CCS±0.008mm) x 1	
	SIZE	12mm+16mm	
	COVERAGE	125%	
MYLAR	SIZE	20mm	
	COVERAGE	125%	
	MATERIAL	CCS	
DRAIN	SIZE	7/0.12CCS±0.008mm	
	MATERIAL	AL-MG ALLOY	
	SIZE	8 x 16/0.12±0.008mm	
BRAID	COVERAGE	85%	
	MATERIAL	BLACK PVC	
	COLOUR	BLACK	
JACKET	OD	9.0±0.2mm	

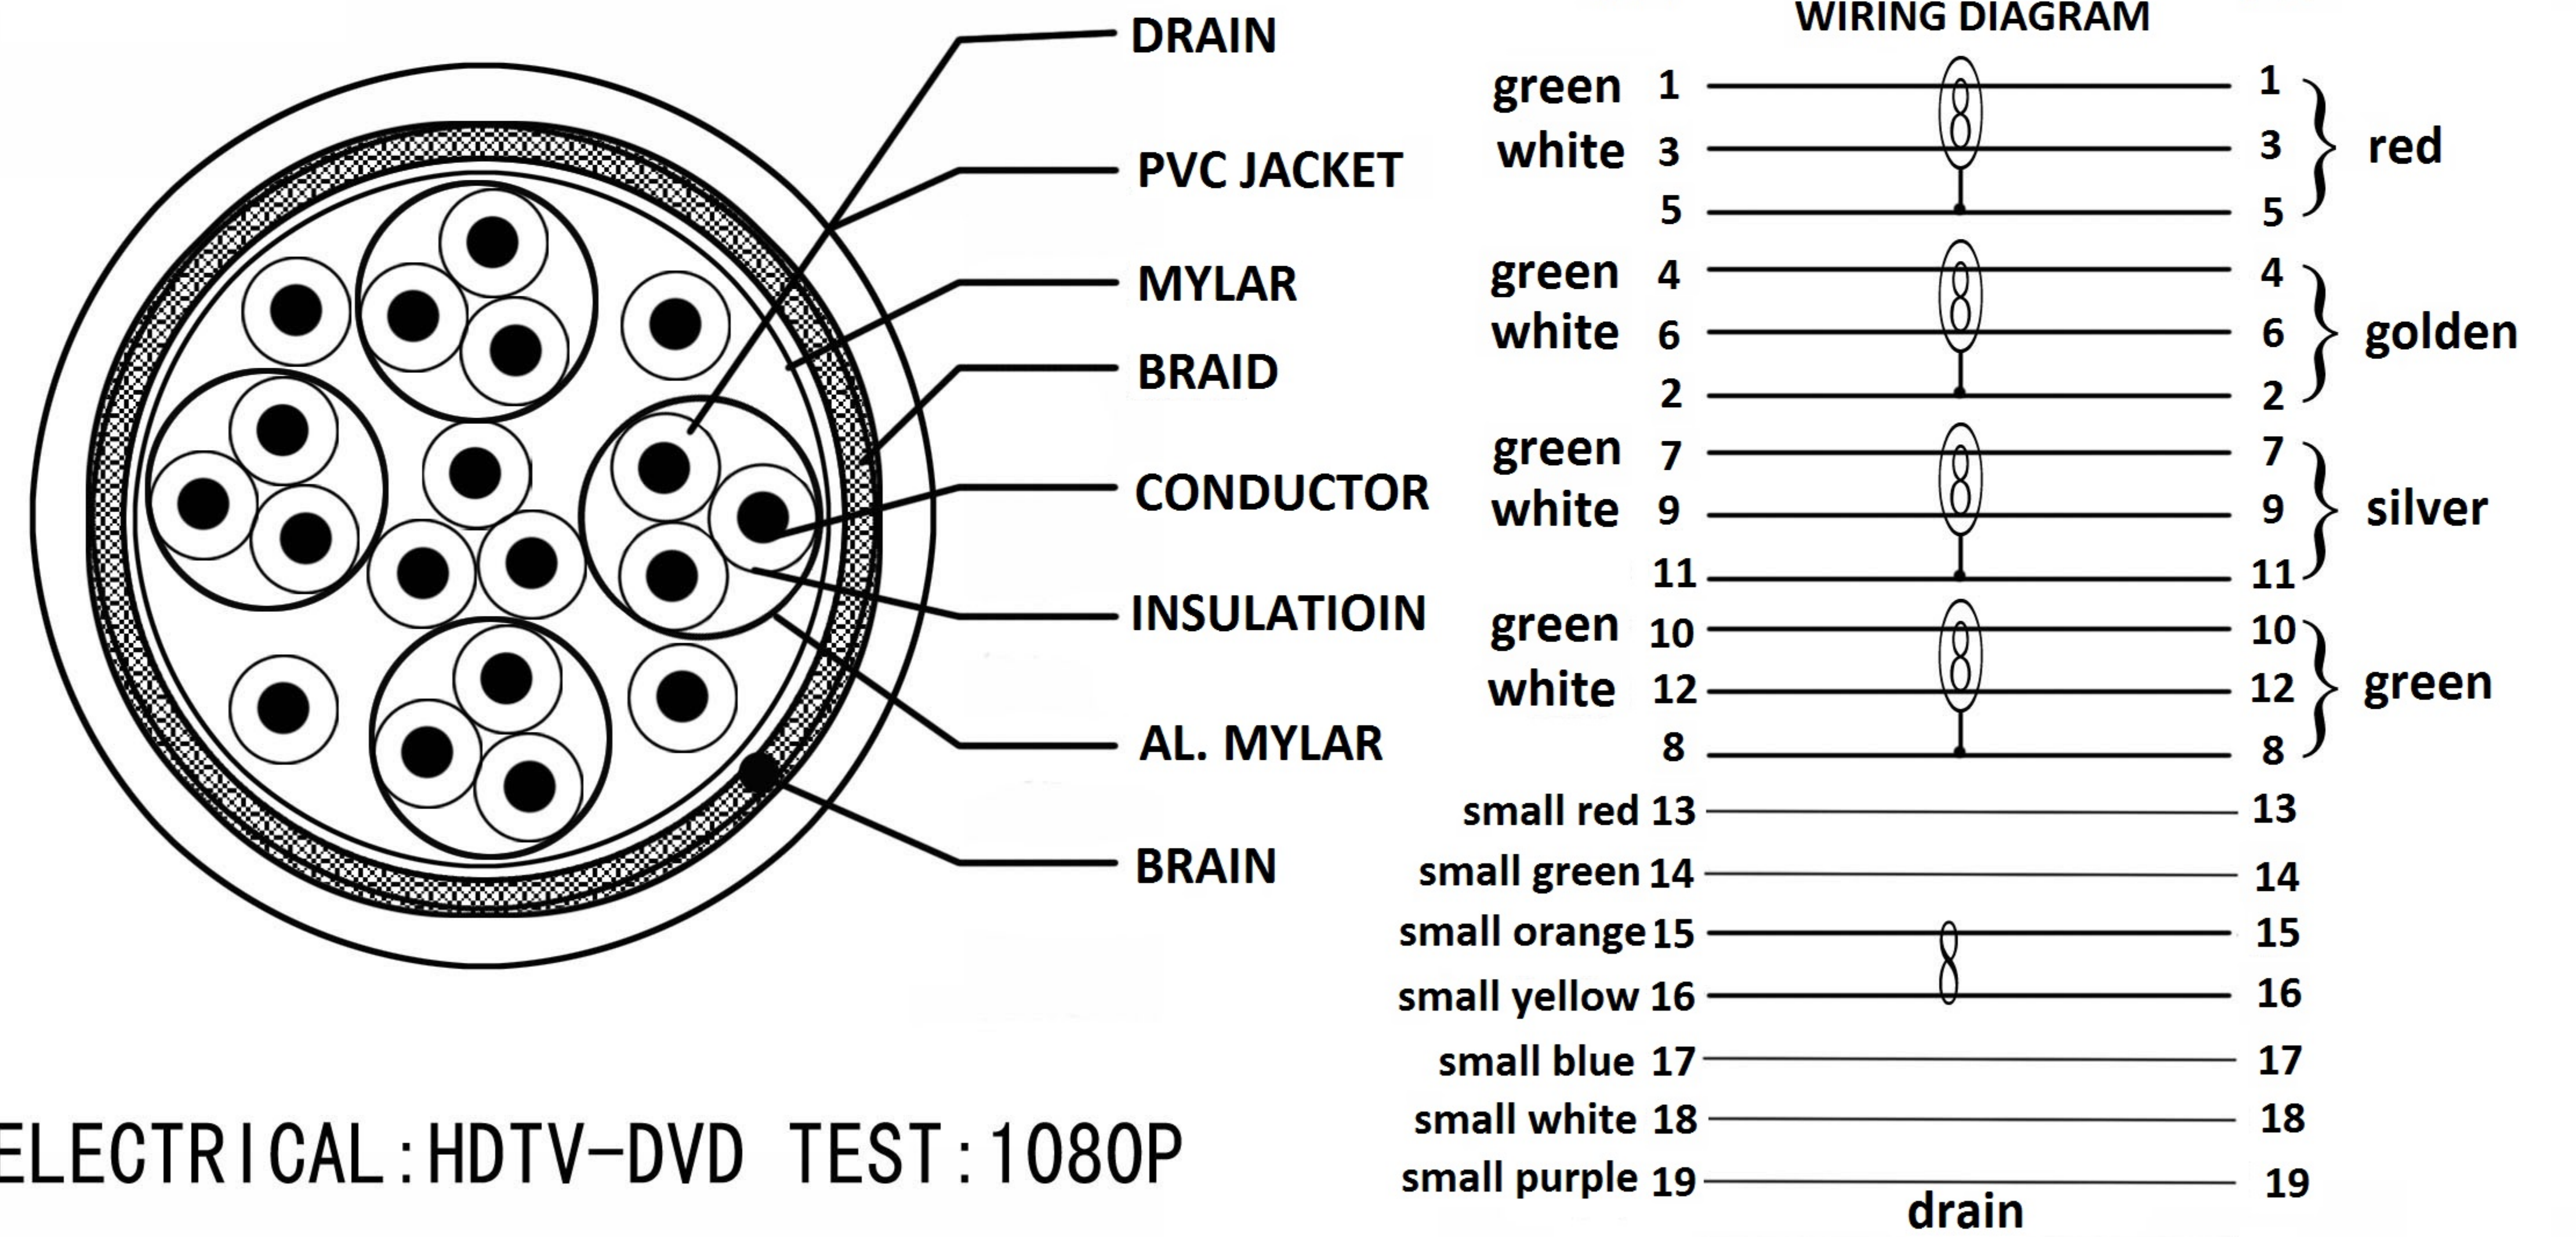

MODEL NO. : 11.99.5534

11.99.5536

CHECKED: Zhang Guo Yu

CUSTOMER:

APPROVED: Liu Wen Jun

DESIGN: Liu Ting Feng

VALUE HDMI High Speed Cable, A M/A M, black

DRAWING: Zhuang Qing Yan

DATE: 2016.6.23

SECOMP